


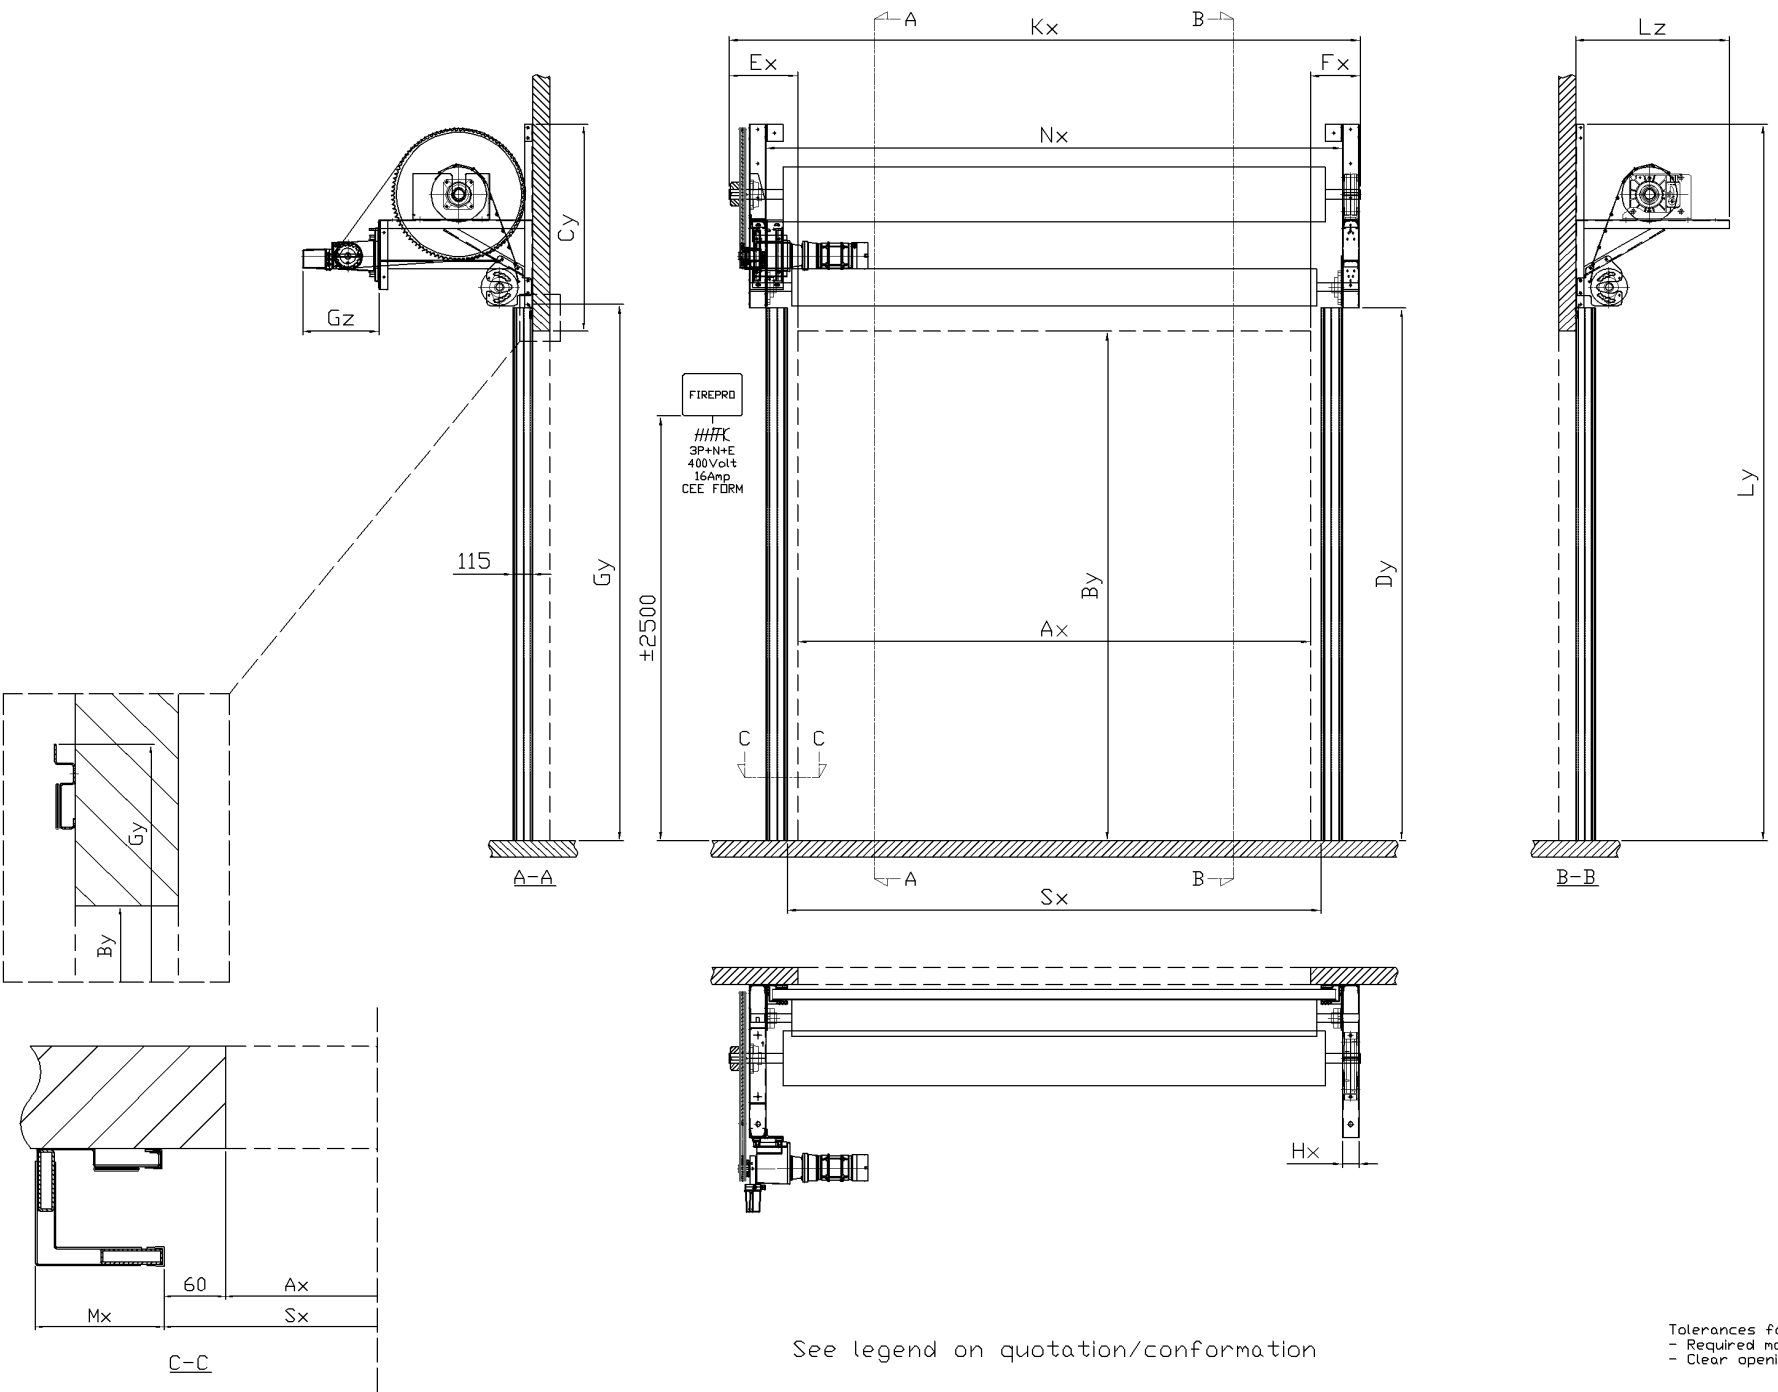

See legend on quotation/conformation

Tolerances for supporting construction:
- Required mounting dimensions only +/-
- Clear opening dimensions only +/-

Tolerances for total dimensions	
	1mm
	2mm
	2mm
	1mm

RGS_2-L-Voor

Product	Fire rated roller shutter (RGS EI) - EI(1) 30 / EI(2) 60
Position number	30
Motor side	Left

Ax	Clear width	1300 mm
By	Clear height	3500 mm
Cy	Built-in height	1333 mm
Dy	Bottom of consoles	3926 mm
Ex	Space motor side	336 mm
Fx	Space non-motor side	271 mm
Gy	Height flame hook	3800 mm
Hx	Console width	80 mm
Mx	Guide width	125 mm
Kx	Total width	1907 mm
Ly	Total height	4833 mm
Nx	Distance between consoles	1670 mm
Lz	Console depth (excl. engine)	876 mm
Gz	Motor height	506 mm
Sx	Distance between guides	1420 mm

Connection value	400Volt / 1,5 Ampère / 300 Watt
Closing speed	60-100 mm/sec
Application temperature	-5 t/m 40 °C
Maximum usage frequency per day	25

Weight door leaf	215
Number of pallets	2
Package 1	3780x900x1450 mm
Pallet 1 net weight	267
Pallet 1 gross weight	292
Package 2	1200x800x876 mm
Pallet 2 net weight	167
Pallet 2 gross weight	192

Model version	13815
---------------	-------



RIDEAUFR.FR

By 4M Fermetures