


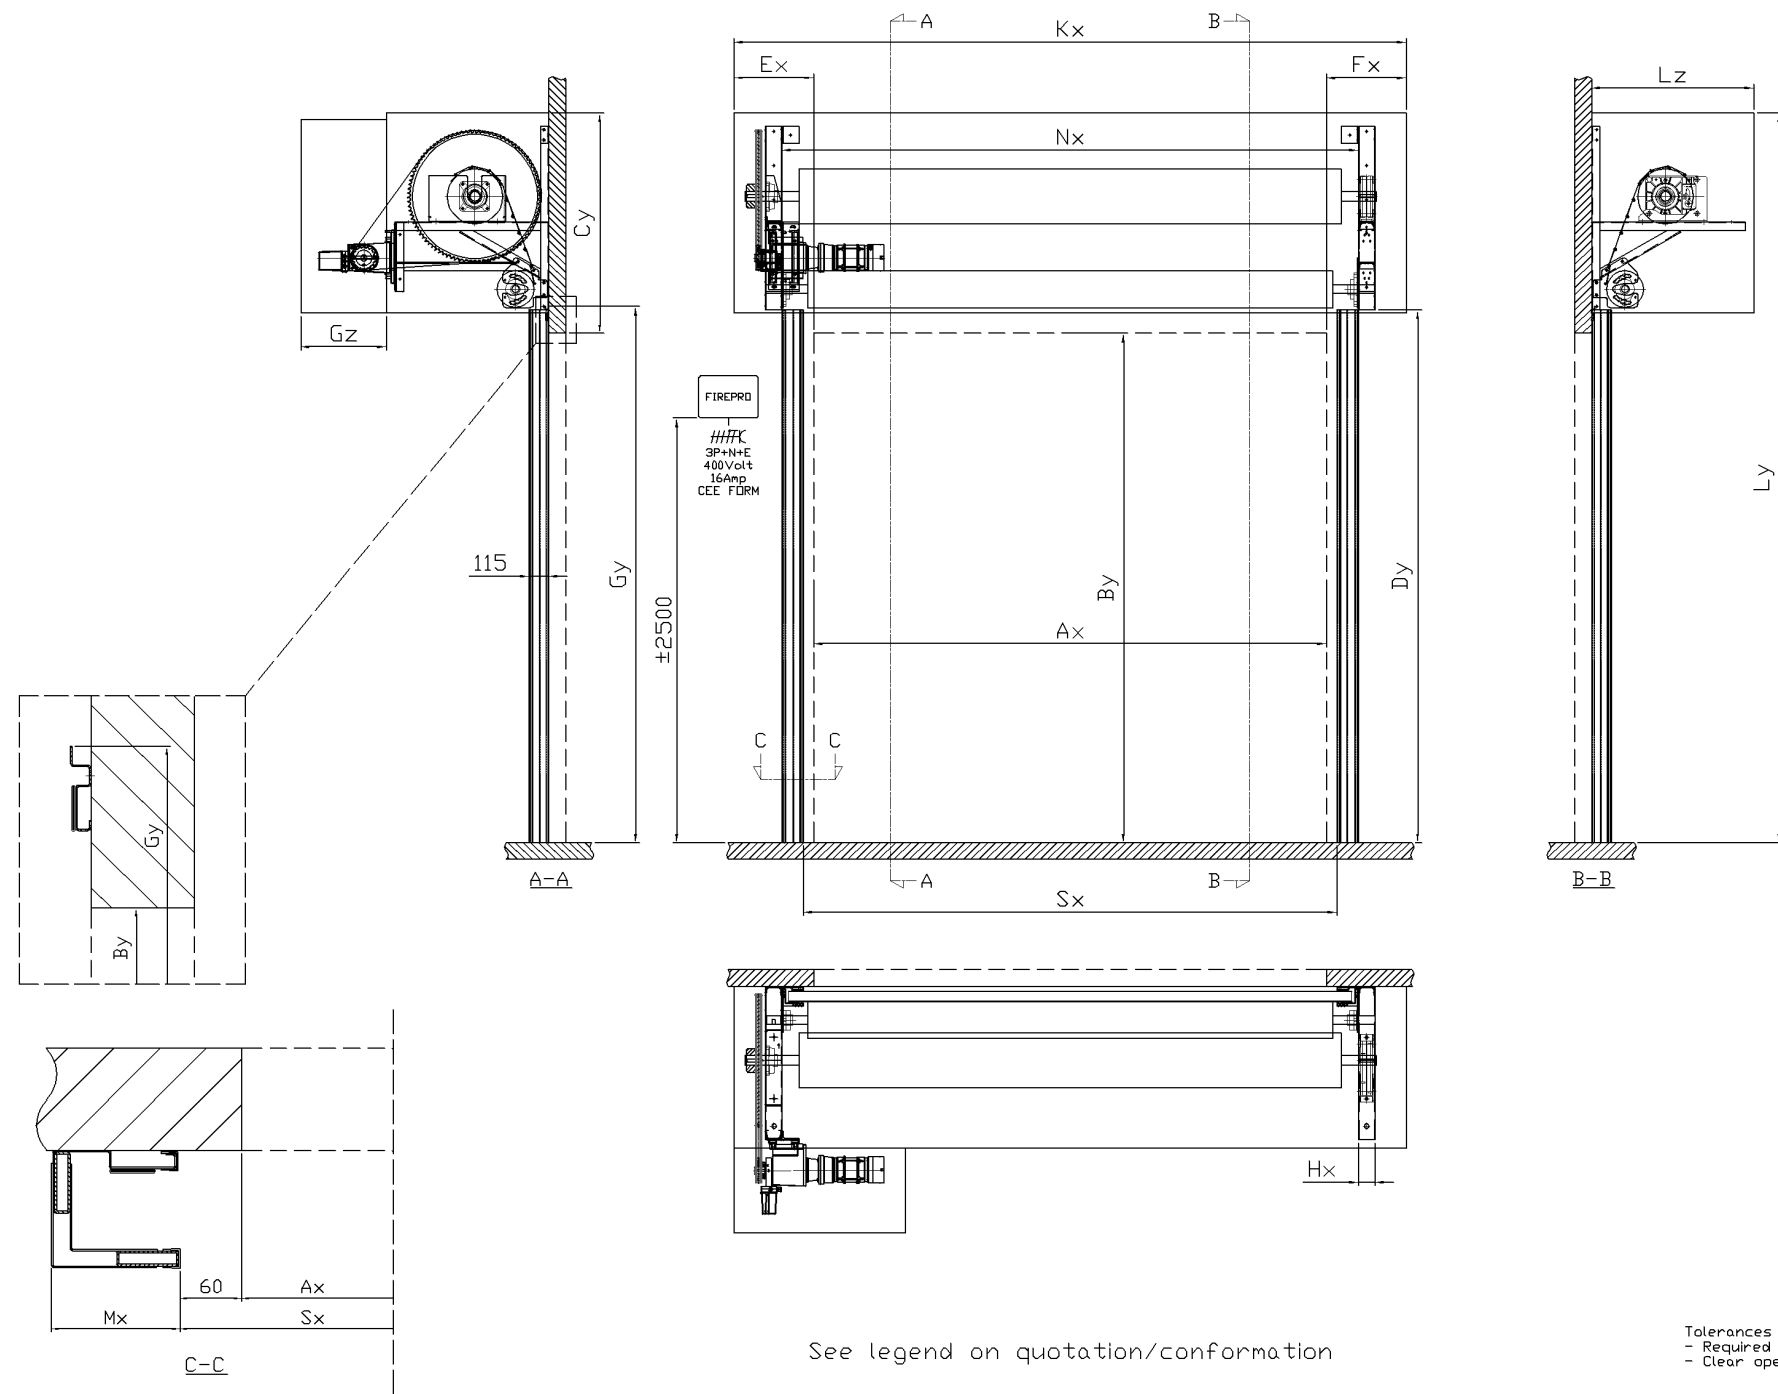

Tolerances for supporting construction:
- Required mounting dimensions only +/-
- Clear opening dimensions only -/-

RGS_2-L-Voor-Dmk

Tolerances for total dimensions	
—	1mm
□	2mm
△	2mm
⊥	1mm

Product		Fire rated roller shutter (RGS EI) - EI(1) 30 / EI(2) 60
Position number		10
Motor side		Left
Ax	Clear width	2500 mm
By	Clear height	2500 mm
Cy	Built-in height	1211 mm
Dy	Bottom of consoles	2808 mm
Ex	Space motor side	415 mm
Fx	Space non-motor side	415 mm
Gy	Height flame hook	2761 mm
Hx	Console width	80 mm
Mx	Guide width	125 mm
Kx	Total width	3330 mm
Ly	Total height	3711 mm
Nx	Distance between consoles	2870 mm
Lz	Cover box depth	950 mm
Gz	Motor cover box depth	500 mm
Sx	Distance between guides	2620 mm
Connection value		400Volt / 1,5 Ampère / 300 Watt
Closing speed		60-100 mm/sec
Application temperature		-5 t/m 40 °C
Maximum usage frequency per day		25
Weight door leaf		277
Number of pallets		3
Package 1		3107x800x1350 mm
Pallet 1 net weight		370
Pallet 1 gross weight		395
Package 2		1200x800x876 mm
Pallet 2 net weight		140
Pallet 2 gross weight		165
Package 3		1665x1033x500 mm
Pallet 3 net weight		240
Pallet 3 gross weight		265
Model version		13815
		
RIDEAUFER.FR		
<i>By 4M Fermetures</i>		