


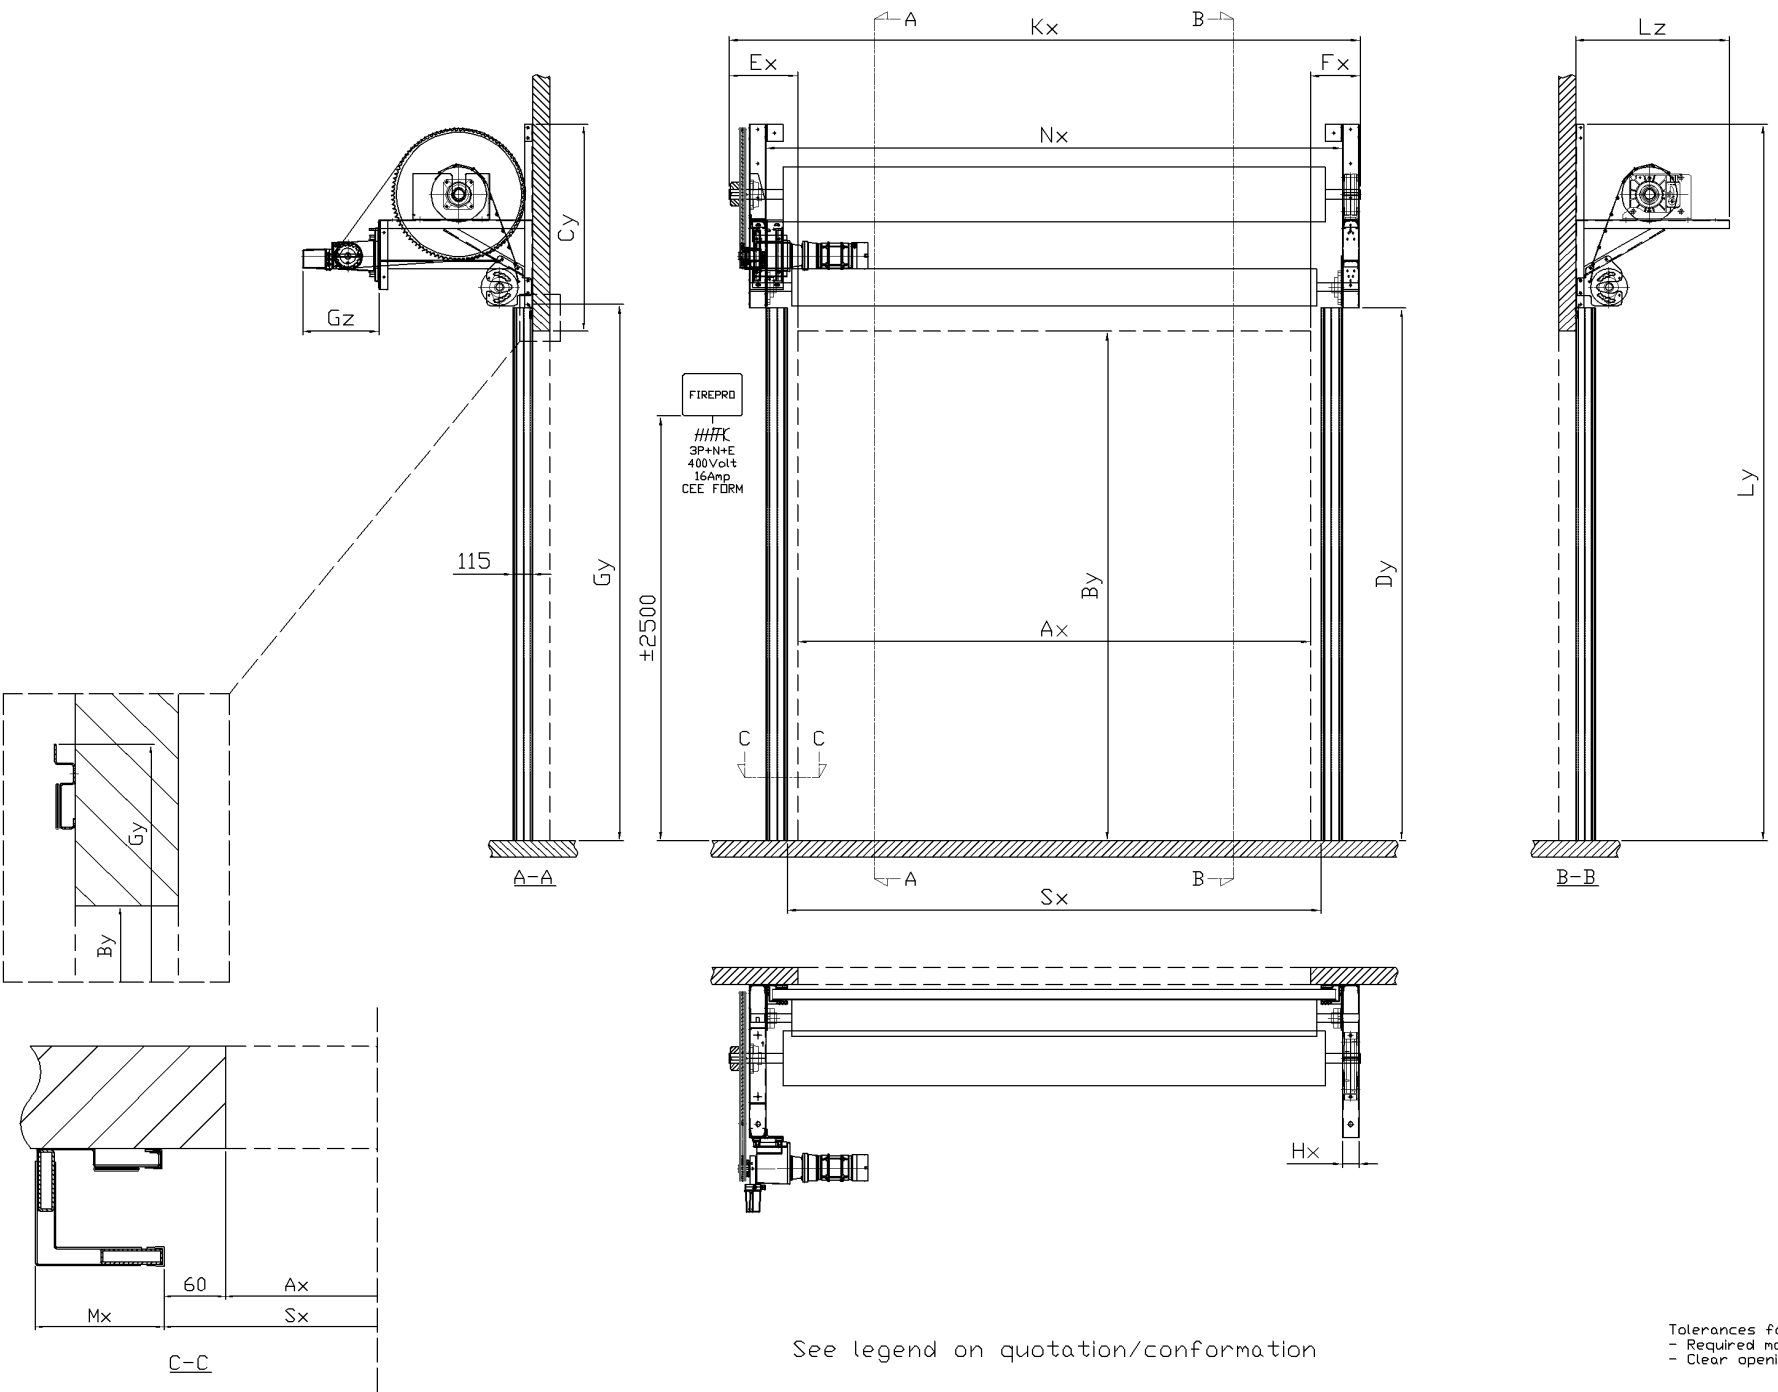

See legend on quotation/conformation

Tolerances for supporting construction:
- Required mounting dimensions only +/-
- Clear opening dimensions only +/-

Tolerances for total dimensions	
	1mm
	2mm
	2mm
	1mm

RGS_2-L-Voor

Product	Fire rated roller shutter (RGS EI) - EI(1) 30 / EI(2) 60
Position number	20
Motor side	Left

Ax	Clear width	3000 mm
By	Clear height	3000 mm
Cy	Built-in height	1239 mm
Dy	Bottom of consoles	3332 mm
Ex	Space motor side	374 mm
Fx	Space non-motor side	299 mm
Gy	Height flame hook	3206 mm
Hx	Console width	80 mm
Mx	Guide width	150 mm
Kx	Total width	3673 mm
Ly	Total height	4239 mm
Nx	Distance between consoles	3420 mm
Lz	Console depth (excl. engine)	876 mm
Gz	Motor height	506 mm
Sx	Distance between guides	3120 mm

Connection value	400Volt / 1,5 Ampère / 300 Watt
Closing speed	60-100 mm/sec
Application temperature	-5 t/m 40 °C
Maximum usage frequency per day	25

Weight door leaf	380
Number of pallets	2
Package 1	3672x900x1450 mm
Pallet 1 net weight	492
Pallet 1 gross weight	517
Package 2	1200x800x876 mm
Pallet 2 net weight	164
Pallet 2 gross weight	189

Model version	13815
---------------	-------



RIDEAUFR.FR

By 4M Fermetures